


SWTL-4538 Pale cingolate

Peso operativo: 9.700 LIBBRE (4.400 KG)

Potenza lorda: 74,3 CV (55,4 kW)

Forza di strappo: 7.470 lb (3.385 kg)

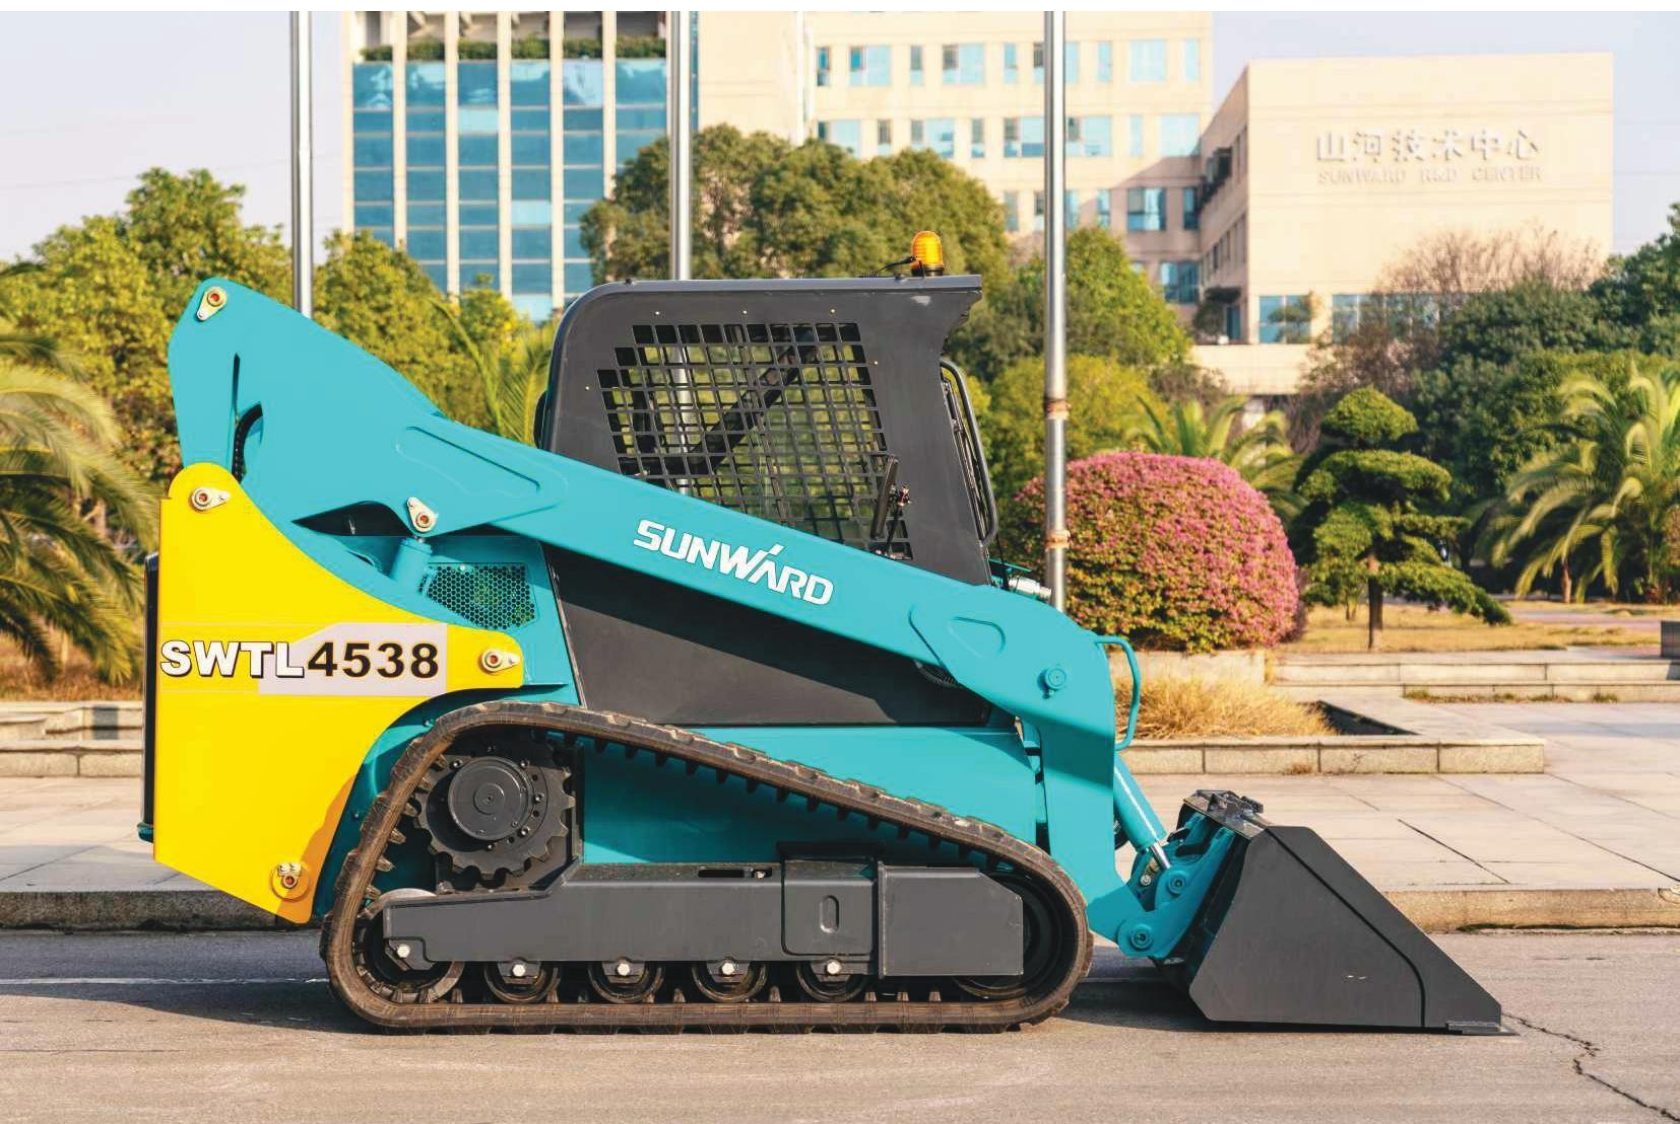

Girare sopra
per
Indicazioni!

Caratteristiche principali del prodotto

- Kubota Engine privdes EPA T4F emission Standards
- Sistema di spostamento idraulico chiuso per sistemi anti-sovraccarico
- Perni universali per attacchi rapidi
- Controlli a doppio acceleratore per adattare potenza e controllo
- La cabina Enlcosed offre sicurezza e comfort per orari di lavoro prolungati in condizioni difficili

Specifiche tecniche

Machine Weight		9,700 lb	4,400 kg
Machine Dimensions	Overall Length	12' 4"	3,750 mm
	Overall Height	9' 10"	2,071 mm
	Overall Width	6' 7"	2,015 mm
	Ground Clearance	9"	228 mm
Engine	Brand	KUBOTA	
	Model	V2403-CR-TE5B	
	Peak Torque	195.5 lb-ft	265 N-m
	Output	74.3 HP	55.4 kW
	Max Speed	8.1 mpha	13 kph
	Rated Operating Capacity	2,650 lb	1,200 kg
	Tipping Load	7,570 lb	3,430 kg
	Curl Breakout Force	7,740 lb	3,385 kg
	Lift Breakout Force	5,740 lb	2,600 kg
	Turning Redius from Center	4' 6"	1,368 mm
	Departure Angle	34 Degrees	
	Dump Height	8' 1"	2,467 mm
	Dump Reach	2' 11"	891 mm
	Max Dump Angle	44 Degrees	
Hydraulics	Brand	KYB	
	Displacement	23.8 gal/min	90 L/min
	Pressure	3,045 psi	210 bar
Fuel and Hydraulics Tanks	Fuel Tank Capacity	23.8 Gal	90 L
	Hydraulic Oil Capacity	10.6 Gal	40 L

